




EXTREMELY EASY TO USE, KEEP YOUR STOCK SUPER SIMPLE

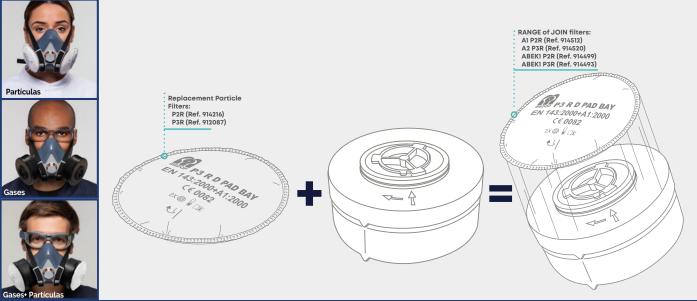

JOIN FILTERS combine a particle filter with a gas filter allowing for each of them to be used independently: 1 product, 3 solutions. Both filters can be used either alone (directly on the half mask) or combined (both filters paired together).

There is no need for adapters, pre-filters, or any other kind of additional accessories for adjusting both filters.

The **JOI** filter system allows you to only replace the particle filter once it has become saturated while still using the gas filter for its useful life.

- Casing made of HIGH-STRENGTH and HYPOALLERGENIC ABS material
- O High-performance filter for **EXCELLENT FILTRATION EFFECTIVENESS AND GREAT DURABILITY**
- More intuitive BAYONET CONNECTION system with easy application
- NO NEED FOR ADAPTERS, PRE-FILTERS, OR OTHER ADDITIONAL PIECES to adjust both filters (gases + particles)
- Highly ERGONOMIC thanks to the offset position of the filters, set back from the field of vision, making them COMPATIBLE WITH OTHER KINDS OF PPE
- STOCK EFFICIENCY. 3 filters and one single SKU.
 STOCK SIMPLIFICATION

PROTECTION THAT OFFERS

- O BETTER WORKPLACE HEALTH: All JOIN filters incorporate the innovative pureon CERTIFIED ANTIBACTERIAL PROTECTION that prevents the growth of up to 99.99% of bacteria.
- CERTIFIED BREATHABILITY: The JOIN filters guarantee excellent breathability and meet the standards established by the EN 143 (Particle filters) and EN 14385 requirements (Gas filters and combined filters).
- FORMALDEHYDE: The ABEKIP2R and ABEKIP3R JOIN filters offer protection against formaldehyde, as they have passed the specific NIOSH tests.







AVAILABLE ASSORTMENT:

JOIN FILTERS:

Ref.	Available in	Marking	Tested against Formaldehyde	Maximum level of use	Protection against
914512	Box of 6 JOIN A1 filters + 6 P2R Pad filters	A1 P2R PAD	-	Gases Level 1 Particles 12 x TLV	Organic gases and vapours with a boiling point above 65 °C and solid
914520	Box of 6 JOIN A2 filters + 6 P3R Pad filters	A2 P3R PAD	_	Gases Level 2 Particles 50 x TLV	and liquid particles, such as dust, smoke, aerosols
914499	Box of 6 JOIN ABEK1 filters + 6 P2R Pad filters + Formaldehyde*	ABEK1 P2R PAD	✓	Gases Level 1 Particles 12 x TLV	Inorganic gases and vapours and organic gases and vapours with a boiling point higher than 65 °C. Also sulphur dioxide and other
914493	Box of 6 JOIN ABEK1 filters + 6 P3R Pad filters + Formaldehyde*	ABEK1 P3R PAD	✓	Gases Level 2 Particles 50 x TLV	acid gases and vapours, and solid and liquid particles, such as dust, smoke and aerosols.

The combinable filters are sold together as gases + particles and the particle filters will be replaced as required. Specific NIOSH studies for proven Formaldehyde protection


REPLACEMENT PARTICLE FILTERS:

Ref.	Available in	Marking	Tested against Formaldehyde	Maximum level of use	Protection against
914216	Box of 20 P2R Pad filters (REPLACEMENT particle filter)	P2R PAD	-	Particles 12 x TLV	Callid and limited and the supplies and the supplies accessed
912087	Box of 20 P3R D Pad filters (REPLACEMENT particle filter)	P3R D PAD	-	Particles 50 x TLV	Solid and liquid particles, such as dust, smoke, aerosols

REPLACING THE PARTICLE FILTER

To replace the particle filter, the first thing you have to do is completely remove the filter from the half mask. Then, proceed to change out the particle filter by performing the following steps:


Step 1. Remove the particle filter you want to replace



Remove the particle filter by twisting it to the left (counter-clockwise)



Pull the filter out to separate the particle filter from the gas filter





Set the new particle filter down on the gas filter (take note of the markings on where both filters should connect)



Adjust the filter by twisting it to the right (clockwise)





STANDARD AND CERTIFICATION

EN 143: Respiratory protection equipment: Particle filters

EN 14387: Respiratory protection equipment: Combined filters and gas filters

COMPONENTS						
Silicone*	Not present					
Metal	Not present					

^{*} Although this PPE does not contain silicone, it is recommended to perform tests and try the product in painting areas before use.

OTHER FEATURES							
Uses	nvironments with particle or gas contaminants. o not use when the concentration of contaminant exceeds the Permissible Exposure Limit per filter. he selection of filter will be in accordance with the contaminant and the level of concentration.						
Conservation Storage Expiry	Store in storage case in a cool, well ventilated place, avoiding humidity, dirt and dust. Shelf life of the filters is indicated on them and is valid for sealed wrappers. The expiry date is marked as follows: XX/XXXX (MONTH/YEAR)						
Instructions Use How to use	This item filters contaminated air, but it does not provide oxygen. Thus, it must not be used when the ambient oxygen content is below 19.5% volume. Immediately leave the work area and replace your filters if during use: - You find it hard to breathe. - You feel dizzy or vertigo. - You smell or taste contaminant.						
Presentation	Combinable JOIN Gas + Particle filters Box of 6 gas filters + 6 particle filters Carton of 18 boxes Replacement particle filters: Box of 20 filters Carton of 12 boxes						
Bar code	Ref. Box code Carton barcode 914512 GIN-13 8423173895662 GIN-14 18423173895669 914520 GIN-13 8423173895808 GIN-14 18423173895805 914499 GIN-13 8423173895471 GIN-14 18423173895478 914493 GIN-13 8423173895594 GIN-14 18423173895591 914216 GIN-13 8423173893361 GIN-14 18423173893368 912087 GIN-13 8423173879891 GIN-14 68423173879893						