




Detectable Murmullo with cord

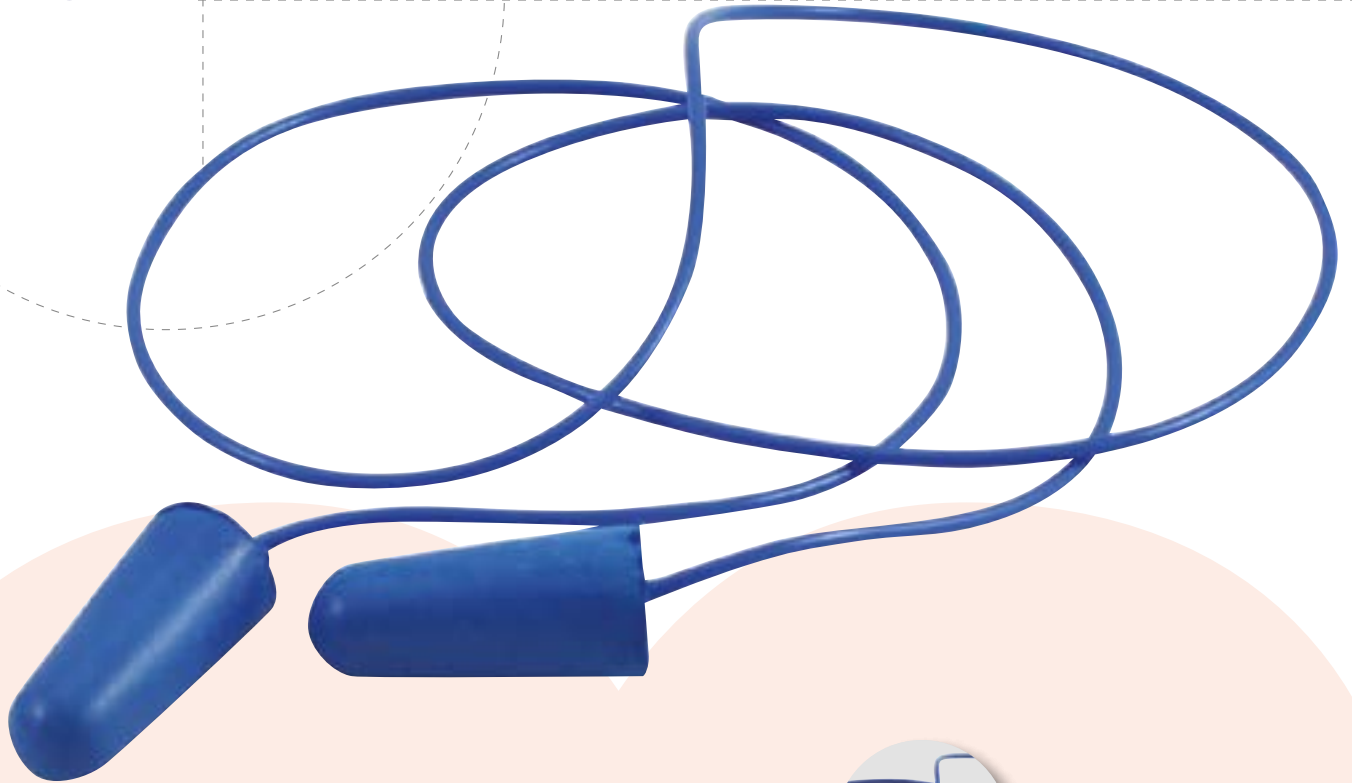

Hearing protection: earplugs

Description:

Made out of polyurethane foam, with a non-porous, soft texture, making them more resistant to dirt.

Hypo-allergenic. Their cone-shape makes insertion and adaptation easier.

Containing metal detectors: specially designed for the food industry. Loss-prevention PVC cord.

SNR: 36 dB

Weight: 2.8 g

EN 352-2 CE

Ref:	Product
911.648	Detectable Murmullo with cord

Characteristics table


Washable	X
Hypo-allergenic	✓
Reusable	X
Single use	✓
Detectable	✓
Cord	✓
Nominal size	6-13



With PVC cord



Detectable

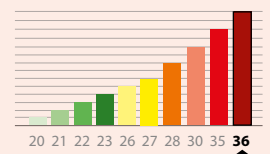

Hearing protection: earplugs

Standard and certification	EN 352-2 CE																																						
Applications	Workplaces with high temperatures. Exposure to intermittent noise. Work environments with a high noise level between 108 dB and 122 dB. Use in the food sector.																																						
Conservation Storage - Expiry	Store in a cool, dry place in their case, avoiding humidity, dirt and dust.																																						
Directions Use	This equipment is for personal use and should not be used by several people. The earplugs must be worn continually in noisy areas. These plugs must not be used in environments where there is a risk of the joining cord being snagged during use.																																						
Presentation	Pairs in individual bags. Dispenser box with 200 pairs in individual bags. 10 boxes per carton.																																						
Bar code	GTIN-13: 8423173875640 GTIN-14: 88423173875646																																						
Attenuation table	<table border="1"> <thead> <tr> <th>Frequency in Hz</th> <th>125</th> <th>250</th> <th>500</th> <th>1,000</th> <th>2,000</th> <th>4,000</th> <th>8,000</th> </tr> </thead> <tbody> <tr> <td>Assumed attenuation</td> <td>38.1</td> <td>37.9</td> <td>39.6</td> <td>37.7</td> <td>37.3</td> <td>48.8</td> <td>45.9</td> </tr> <tr> <td>Typical deviation</td> <td>4.9</td> <td>6.3</td> <td>6.5</td> <td>4.2</td> <td>3.5</td> <td>5.1</td> <td>4.5</td> </tr> <tr> <td>Average attenuation</td> <td>33.2</td> <td>31.6</td> <td>33.1</td> <td>33.5</td> <td>33.8</td> <td>43.3</td> <td>41.4</td> </tr> </tbody> </table> <table border="1"> <tbody> <tr> <td>Global attenuation in frequencies</td> <td>High (H) H = 36</td> <td>Mid (M) M = 34</td> <td>Low (L) L = 33</td> <td>SNR</td> <td>36</td> </tr> </tbody> </table>	Frequency in Hz	125	250	500	1,000	2,000	4,000	8,000	Assumed attenuation	38.1	37.9	39.6	37.7	37.3	48.8	45.9	Typical deviation	4.9	6.3	6.5	4.2	3.5	5.1	4.5	Average attenuation	33.2	31.6	33.1	33.5	33.8	43.3	41.4	Global attenuation in frequencies	High (H) H = 36	Mid (M) M = 34	Low (L) L = 33	SNR	36
Frequency in Hz	125	250	500	1,000	2,000	4,000	8,000																																
Assumed attenuation	38.1	37.9	39.6	37.7	37.3	48.8	45.9																																
Typical deviation	4.9	6.3	6.5	4.2	3.5	5.1	4.5																																
Average attenuation	33.2	31.6	33.1	33.5	33.8	43.3	41.4																																
Global attenuation in frequencies	High (H) H = 36	Mid (M) M = 34	Low (L) L = 33	SNR	36																																		

